


Instructions Enclosed

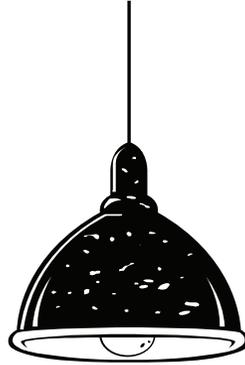

---

**S T E E L**

**L I G H T I N G C O .**

---

**310.569.7056**

Covernut  
w/ Orange Gasket



Socket



Lighting Shade



\*Light Bulb



Arm



Mounting Plate



Black Gasket



\*4" Round Electrical Box



\*Items are not included standard but may be ordered.

Warning Risk of Fire.  
Must Be Installed By a Licensed  
Electrician.  
Make Sure All Power Is Off  
Prior to Installation.  
Suitable for Wet Locations.  
Use With Type A Lamp.

Advertencia Riesgo de incendio. Debe ser  
instalado por un electricista con licencia.  
Asegúrese de que toda la alimentación  
esté apagada antes de la instalación.  
Adecuado para ubicaciones húmedas.  
Uso con lámpara de tipo A.

Avertissement Risque d'incendie. Doit  
être installé par un électricien sous  
licence.  
Veillez à ce que toute alimentation soit  
désactivée avant l'installation.  
Convient aux emplacements humides.  
Utilisation avec la lampe de type A.



# Steel Lighting Co Assembly and Installation

## STEP 1:

Ensure the **Orange Gasket** is firmly set into the wedge on the bottom of the **Covernut**.

Unravel the wires from the **Socket** and pull them through the inside of the **Lighting Shade**.

Slide the **Covernut** over the wires and **REVERSE THREAD** the **Covernut** onto the top of the **Socket**.

**The Socket should be secure in the Lighting Shade and the wires should be coming out of the top.**

## STEP 2:

Thread the **Arm** into the round **Mounting Plate**. Then feed the wires from the **Lighting Shade** through the **Arm** and out through the **Mounting Plate**.

**Thread the Arm and the Lighting Shade to complete Assembly!**

### Installation of Lighting Fixture

This lighting fixture includes a 4" round **Mounting Plate**. We recommend a **4" Round Electrical Box** to match our **Mounting Plate**. If our **Mounting Plate** does not fit, please consult your electrician for alternative mounting options for 1/2" threaded rigid pipe.

Use the **Black Gasket** between the back of the **Mounting Plate** and your **4" Round Electrical Box**. Make wire connection and complete installation by using the (4) included screws.

**Take a photo of the installed lighting fixture and tag us @steellightingco on Instagram for a Free LED bulb!**

# Installation Instructions

## CORD INSTALLATION

### STEP 1:

Pull cord through the inside of the lighting fixture so that socket is in the neck of the fixture and the Cord is coming out of the top **(see fig. 1)**

### STEP 2:

Insert Orange Rubber Gasket into wedge on Covernut. Slide the Covernut over the Cord and reverse thread the Covernut onto the top of the Socket **(the Socket should be secure in the fixture and Cord coming out of the top)**

### STEP 3:

Cut the Cord to the desired length and slip the Canopy, Bracket (w/ 2 Screws threaded) and Strain Relief over cord.



### STEP 4:

**Fixtures must be installed according to local codes and NEC by a qualified electrician. Make sure all power is disconnected prior to installation.**

Make wiring connection, crimp strain relief and screw the bracket to the electrical box.

### STEP 5:

Attach the canopy to the screws on the bracket, then secure the screws with the acorn nuts.

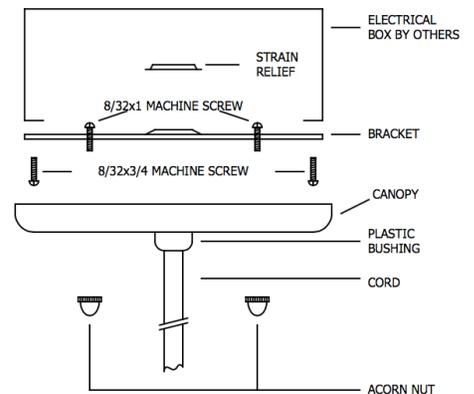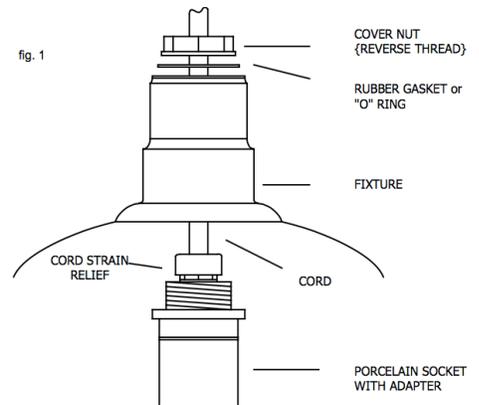

Hello!

Thank you so much for your **Steel Lighting Co.** purchase! We have been proudly creating these fixtures for over 20 years in Los Angeles, California. As a family owned and operated business, we take a huge amount of pride in our work and we hope that you see that in the products that you have received.

If for any reason you are unhappy with your order, or you have questions about ordering more, we are just a phone call away! Just mention this note and receive 10% off all your future orders.

Thank you from sunny California!

Rachel and Aaron Abergel

**310.569.7056**  
**SteelLightingCo.com**

