


**Instructions Enclosed
Stem Pendant**

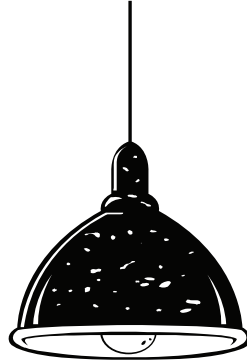

S T E E L

L I G H T I N G C O .

310.569.7056

Covernut
w/ Orange Gasket



Socket



Lighting Shade



*Light Bulb



Rigid Pipe 6"-12"



Mounting Plate



Black Gasket



*4" Round Electrical Box



*Items are not included standard but may be ordered.

Warning Risk of Fire.
Must Be Installed By a Licensed
Electrician.
Make Sure All Power Is Off
Prior to Installation.
Suitable for Wet Locations.
Use With Type A Lamp.

Advertencia Riesgo de incendio. Debe ser
instalado por un electricista con licencia.
Asegúrese de que toda la alimentación
esté apagada antes de la instalación.
Adecuado para ubicaciones húmedas.
Uso con lámpara de tipo A.

Avertissement Risque d'incendie. Doit
être installé par un électricien sous
licence.
Veillez à ce que toute alimentation soit
désactivée avant l'installation.
Convient aux emplacements humides.
Utilisation avec la lampe de type A.



Steel Lighting Co Assembly and Installation

STEP 1:

Ensure the **Orange Gasket** is firmly set into the wedge on the bottom of the **Covernut**. Unravel the wires from the **Socket** and pull them through the inside of the **Lighting Shade**. Slide the **Covernut** over the wires and **REVERSE THREAD** the **Covernut** onto the top of the **Socket**.

The Socket should be secure in the Lighting Shade and the wires should be coming out of the top.

STEP 2:

Thread the **Stem** into the round **Mounting Plate**. Then feed the wires from the **Lighting Shade** through the **Stem** and out through the **Mounting Plate**.

Thread the Stem and the Lighting Shade to complete Assembly!

Installation of Lighting Fixture

This lighting fixture includes a 4" round **Mounting Plate**. We recommend a **4" Round Electrical Box** to match our **Mounting Plate**. If our **Mounting Plate** does not fit, please consult your electrician for alternative mounting options for 1/2" threaded rigid pipe.

Use the **Black Gasket** between the back of the **Mounting Plate** and your **4" Round Electrical Box**. Make wire connection and complete installation by using the (4) included screws.